Product Datasheet

STD-28G

Emergency Eye/Face Wash - Self Contained

11 litre portable eye bath unit incorporating a stainless steel cylinder with pressure gauge and a hand-held eye bath diffuser on a flexible hose for ease of use. Available with an optional wall cabinet or heated cabinet.



Specifications

MATERIAL Stainless steel cylinder CAPACITY 11 litres (2.9 US Gallons) SERVICES OPERATING PRESSURE 6.9 BAR G (100 PSI) TEST PRESSURE 13.8 BAR G (200 PSI) BURST PRESSURE 69 BAR G (1000 PSI) FLOW RATE 69 litres per minute (1.59 gpm) ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE 5° C (41° F) MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION ACTIVATION Hand operated lever WEIGHTS and DIMENSIONS	BODY	
SERVICES OPERATING PRESSURE 6.9 BAR G (100 PSI) TEST PRESSURE 13.8 BAR G (200 PSI) BURST PRESSURE 69 BAR G (1000 PSI) FLOW RATE 6 litres per minute (1.59 gpm) ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION Hand operated lever	MATERIAL	Stainless steel cylinder
OPERATING PRESSURE 6.9 BAR G (100 PSI) TEST PRESSURE 13.8 BAR G (200 PSI) BURST PRESSURE 69 BAR G (1000 PSI) FLOW RATE 6 litres per minute (1.59 gpm) ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION Hand operated lever	CAPACITY	11 litres (2.9 US Gallons)
TEST PRESSURE 13.8 BAR G (200 PSI) BURST PRESSURE 69 BAR G (1000 PSI) FLOW RATE 6 litres per minute (1.59 gpm) ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION Hand operated lever	SERVICES	
BURST PRESSURE 69 BAR G (1000 PSI) FLOW RATE 6 litres per minute (1.59 gpm) ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE 5° C (41° F) MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION Hand operated lever	OPERATING PRESSURE	6.9 BAR G (100 PSI)
FLOW RATE 6 litres per minute (1.59 gpm) ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE 5° C (41° F) MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION ACTIVATION Hand operated lever	TEST PRESSURE	13.8 BAR G (200 PSI)
ENVIRONMENTAL OPERATING TEMPERATURE MINIMUM AMBIENT OPERATING TEMPERATURE 5° C (41° F) MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION ACTIVATION Hand operated lever	BURST PRESSURE	69 BAR G (1000 PSI)
MINIMUM AMBIENT OPERATING TEMPERATURE 5° C (41° F) MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION ACTIVATION Hand operated lever	FLOW RATE	6 litres per minute (1.59 gpm)
MAXIMUM AMBIENT OPERATING TEMPERATURE 35° C (95° F) ACTIVATION/OPERATION ACTIVATION Hand operated lever	ENVIRONMENTAL OPERATING TEMPERATURE	
ACTIVATION/OPERATION ACTIVATION Hand operated lever	MINIMUM AMBIENT OPERATING TEMPERATURE	5° C (41° F)
ACTIVATION Hand operated lever	MAXIMUM AMBIENT OPERATING TEMPERATURE	35° C (95° F)
The state of the s	ACTIVATION/OPERATION	
WEIGHTS and DIMENSIONS	ACTIVATION	Hand operated lever
	WEIGHTS and DIMENSIONS	
DIMENSIONS (WxDxH) 180mm (7.1in) x 180mm (7.1in) x 675mm (26.6in)	DIMENSIONS (WxDxH)	180mm (7.1in) x 180mm (7.1in) x 675mm (26.6in)
WEIGHT 15kg (33lbs) full, 4kg (9lbs) empty	WEIGHT	15kg (33lbs) full, 4kg (9lbs) empty

View our Guide to the ANSI/ISEA Z358.1-2014 International Standard for Emergency Eyewash and Shower Equipment at www.hughes-safety.com







Product Datasheet - G.A. Drawings

STD-28G

Emergency Eve/Face Wash - Self Contained

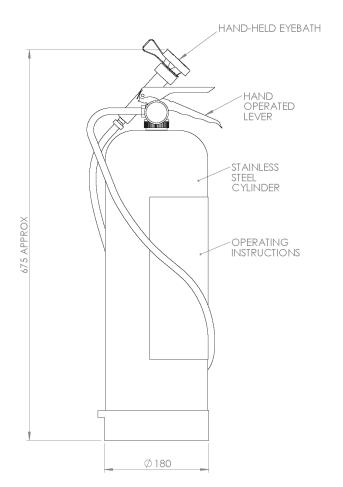

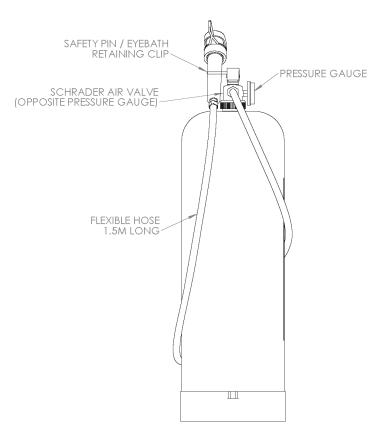



Hughes Safety Showers Ltd, Whitefield Road, Bredbury, Stockport SK6 2SS UK. **Email: sales@hughes-safety.com**

Tel: +44 (0)161 430 6618